

UNITEN 5

WIDIA/WIDIA/EPDM

X1E1X1E1R1R1E1 (X7X7RR7)

Use: for 140° water, acetates, alcohols, clean ketones, excluding oils and hydrocarbons with the presence of abrasives.

WIDIA/WIDIA/FPM

X1Y1X1Y1R1R1Y1 (XYXYRRY)

Use: for hydrocarbons at 180°, in the presence of abrasives.


EN 12756 compliant

Rotation: uni directional right

Stationary ring: with O-ring

Max pressure: 16 bar

ROTEN®

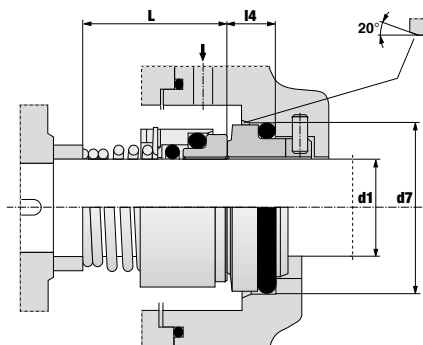

Dimensions mm

SHAFT	ROTATING PART	STATIONARY RING		SHORT TAIL		SHORT TAIL	
		d7	l4	WIDIA/WIDIA/EPDM	€	WIDIA/WIDIA/FPM	€
d1	L			CODE		CODE	
12	18	23	7	0122012	147.87	0115012	157.71
14	22	25	7	0122014	172.75	0115014	180.29
16	23	27	7	0122016	183.58	0115016	193.00
18	24	33	10	0122018	241.46	0115018	251.16
20	25	35	10	0122020	244.80	0115020	255.85
22	25	37	10	0122022	298.98	0115022	312.01
24	27	39	10	0122024	303.49	0115024	316.80
25	27	40	10	0122025	344.91	0115025	359.87
28	29	43	10	0122028	408.50	0115028	424.12
30	30	45	10	0122030	427.99	0115030	444.74
32	30	48	10	0122032	447.17	0115032	468.92
33	39	48	10	0122033	617.86	0115033	655.45
35	39	50	10	0122035	656.84	0115035	696.91
38	42	56	13	0122038	866.32	0115038	918.06
40	42	58	13	0122040	872.46	0115040	924.21
43	47	61	13	0122043	935.03	0115043	992.86
45	47	63	13	0122045	1016.23	0115045	1083.00
48	47	66	13	0122048	1153.33	0115048	1219.83
50	46	70	14	0122050	1245.67	0115050	1318.32

- to place an order for a mechanical seal with left-handed rotation, add SX after the code. For example: 0122028SX (5% increase on the price list)

On request, uniten 5 mechanical seals are also available with SILICON/SILICON, SILICON/WIDIA, SILICON/GRAPHITE, WIDIA/GRAPHITE combinations.

Info: On pages 12 and 13 there are EPDM and FPM o-rings available.

